

【IPカメラ】 SDカードを使用して録画の設定&再生をする方法

2023年7月

カメラのカバーを開ける

①カメラの背面のネジを外します。

※機器によって構造が異なります。


本マニュアルは「DH-IPC-HFW2431TN-ZS-S2」を使用しています。

②SDカードのロットを確認します。



SDカードを挿入する

- ③SDカードの向きに注意してスロットのカードを差し込みます。
- ④SDカードを奥まで挿すことができれば設置完了です。

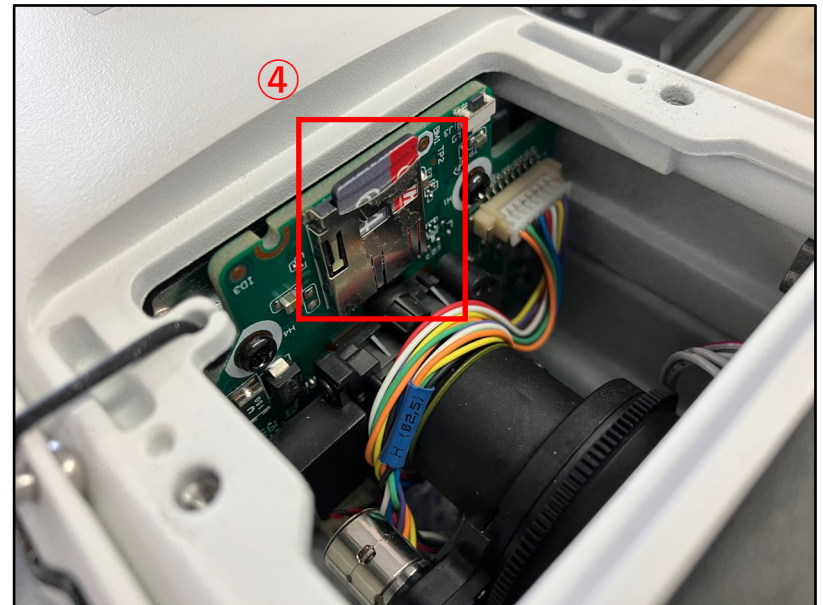

録画スケジュールの設定

PCでカメラにアクセスします。

① 「設定」ボタンをクリックします。

② 「設定」ボタンをクリックします。

録画スケジュールの設定

録画スケジュールの設定画面のスクリーンショット。設定ダイアログボックスが表示されており、録画の方式と期間を選択するためのオプションが示されています。

③ 録画の方式を選択します。（「一般」は「常時録画」ことです。）

④ 「期間」と「曜日」を選択して録画する時間帯を設定します。

⑤ 「適用」をクリックし、設定を保存します。

録画映像の再生

The screenshot shows the Dahua web interface. At the top, there is a navigation bar with buttons for 'ライブ' (Live), '検索' (Search), '設定' (Settings), 'アラーム' (Alarm), and 'ログアウト' (Logout). The '検索' button is highlighted with a red box and a circled '1'. Below the navigation bar, there is a large video player area showing a blurred image with the timestamp '2023-06-28 15:59:32'. To the right of the video player is a calendar interface for selecting a date. The date '28' is highlighted with a red box and a circled '2'. Below the video player, there is a playback control bar with a progress bar. The progress bar is highlighted with a red box and a circled '3'. At the bottom of the interface, there are various playback options and filters.

① 「検索」を選択します。

② 映像を再生する日付を選択します。

③ 色が付いたタイムライン上をクリックすると、録画映像が再生されます。